


Saôneise moulds - single radius



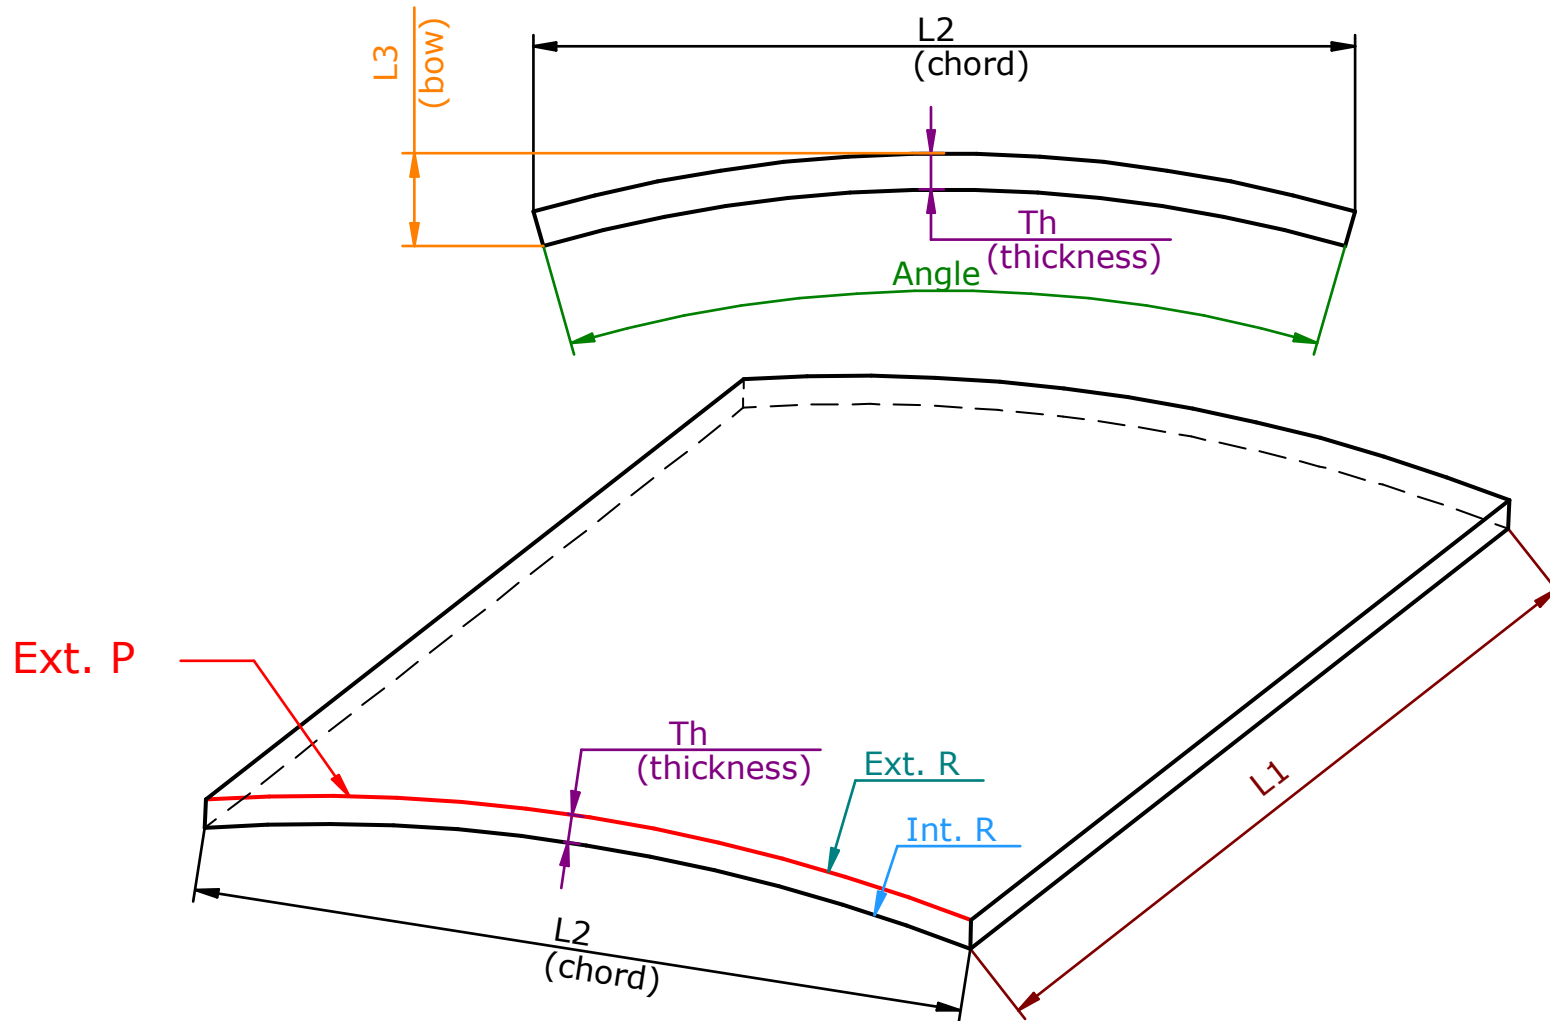

Saôneise de
Contreplaqué Saôneise
mould ref.

	L1 (in mm)	L2 (chord) chord (in mm)	Ext. P Ext. Perimeter in width (in mm)	L3 (bow) height or external bow (in mm)	Th (thickness) maxi thickness (in mm)	Int R mini internal radius (in mm)	Angle maximum angle (in °)
High frequency moulds – single radius							
R 160 C	840	290	370	110	31	164	142
R 174 C	1150	348	560	196	17	179	180
R 226 C	1020	350	400	83	26	230	98
R 237 C	840	474	770	260	11	241	180
R 281 C	1100	420	490	120	30	285	84
R 296 C	680	627	809	228	36	300	138
R 334 C	900	540	630	155	32	338	106
R 360 C1	815	705	1040	300	35	364	130
R 360 C2	900	670	870	270	51	364	130
R 411 C- a	1350	740	920	225	35	415	123
R 411 C - b	660	740	930	225	35	415	123
R 413 C	800	818	1029	277	32	417	131
R 450 C	660	747	840	200	52	454	95
R 476 C	660	725	830	185	71	480	98
R 600 C	1340	770	830	134	35	604	79
R 670 C	930	1070	1240	285	46	674	105
R 772 C	1820	1140	1220	235	25	676	94
R 775 C	600	718	745	103	20	779	53
R 798 C1 - a	730	740	770	85	34	802	60
R 798 C2 - b	830	820	860	100	34	802	60
R 798 C2	900	1065	1160	192	34	802	95
R 830 C	1060	1225	1360	280	36	834	100
R 898 C	570	1050	1137	160	44	902	69
R 906 C	800	797	823	117	32	910	50
R 1127 C	660	907	932	95	35	1131	46
R 1146 C	2500	1200	1260	160	30	1150	63
R 1265 C	570	1262	1317	200	44	1269	57
R 1350 C	880	1145	1180	173	56	1354	48
R 1460 C	750	1299	1343	187	45	1464	51
R 1708 C	1015	1732	1812	258	32	1712	60
R 1760 C	740	747	752	55	16	1764	24
R 1926 C1	1240	1850	1930	235	31	1930	36
R 1926 C2	985	1727	1789	228	31	1930	52
R 2066 C	3200	1345	1369	147	40	2090	37
R 2946 C	3000	1242	1250	212	152	2950	23
R 3266 C	730	1243	1251	93	35	3270	22



Saôneise de
Contreplaqué Saôneise
mould ref.

	L1 (in mm)	L2 (chord) chord (in mm)	Ext. P Ext. perimeter in width (in mm)	L3 (bow) height or external bow (in mm)	Th (thickness) maxi thickness (in mm)	Int R mini internal radius (in mm)	Angle maximum angle (in °)
High frequency moulds – single radius							
R 141	1300	240	272	66	18	142	98
R 300	1450	480	539	122	25	302	94
R 400	1170	350	362	45	6	402	51
R 450	1400	500	528	92	22	442	65
R 480	1050	786	901	201	21	484	102
R 560	1050	650	688	118	25	568	66
R 600	650	335	340	42	19	575	33
R 624	1000	630	658	98	18	624	59
R 665 A	2080	390	396	55	27	638	34
R 665 B	1850	380	385	45	18	647	33
R 706	1350	758	797	123	20	710	63
R 900	1450	510	517	53	18	900	32
R 994	1900	880	910	117	18	994	52
R 1046	750	1057	1127	161	18	1050	60
R1049	1350	720	732	74	18	1061	18
R 1149 A	1850	540	545	49	18	1149	27
R 1525	1480	750	758	64	18	1524	28
R 2220	1670	420	421	28	21	2220	11
Mini Press							
R 2400	1100	430	431	28	18	2262	11
R2533	2200	950	955	43	18	2535	21
R 3150	400	940	944	55	18	2975	18
R 3418	600	650	651	34	18	3247	11
Stream moulds – Single radius							
R 300 V	600	450	501	105	7-8-14-15-16	300	91
R 450 V	620	550	588	105	from 6 to 10 & from 16 to 20 mm	450	72
R 560 V	1000	650	689	119	25	560	68
R 900 V	500	950	998	149	5 to 20 for small dim. 12 mm if L2 > 500 mm	900	62